


For Use With 1 1/2" Fire Hose Rack Assembly

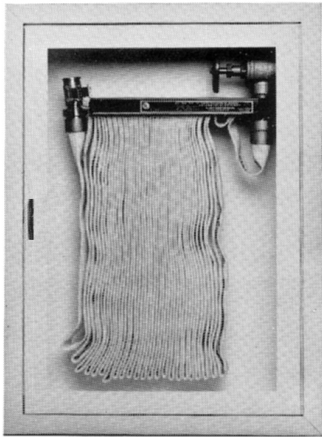

1000 Series

Series 1000 cabinets will accommodate a single 1 1/2 Fire Hose Rack assembly .

STANDARD EQUIPMENT

- * Heavy gauge steel construction tub, door and trim
- * White powder coat finish
- * Continuous steel piano hinge
- * Pull handle with roller catch

CABINET OPTIONS

- * Prefix **FR** for Fire Rated Cabinet
- * Suffix **AL** for clear anodized aluminum door and frame
- * Suffix **SS** for Stainless Steel # 4 finish door and frame
- * Suffix **FF** for Detention Grade Heavy Steel Door And Trim
- * Door Styles See page 2-5
- * Other cabinet options See page 2-7, 2-19 and 2-20

ORDERING PROCEDURE

- * Select cabinet Figure No.
- * Select door style
- * Select type of hose rack assembly (Refer to Section 3000)
- * Select extinguisher if required (Refer to Section 4000) 5lb. ABC will fit this series
- * Select cabinet options

Fig. No.	Trim Style	Trim Proj Tp.	Valve Cap.	Hose Cap.	Inside box dimensions			Overall Outside dim		Knockout locations				Wall Opening Required			FIRE RATED CABINETS Wall Opening Required FR Option		
					A	B	C	D	E	J	K	M	N	Width	Height	Depth	Width	Height	Depth
1000	Recessed	3/8"	1 1/2"	75'	24	30	6	27 3/8	33 3/8	4	2 1/2	4	2 1/2	25	31	5 3/4	26	32 1/8	6 5/8
1001	Semi-recessed	1 1/4"	1 1/2"	Poly	24	30	6	27 3/8	33 3/8	4	2 1/2	4	2 1/2	25	31	4 7/8	26	32 1/8	5 3/4
1002	Trimless	2 1/2"	1 1/2"	50'	24	30	6	27 3/8	33 3/8	4	2 1/2	4	2 1/2	25	31	3 5/8	26	32 1/8	4 1/2
1006	Surface		1 1/2"	SJRL	24	30	6	24 1/4	30 1/4	4	2 1/2	4	2 1/2	24 1/2	30 1/2	6 1/4			
1008	Surface		1 1/2"	Hose	27 3/16	33 3/16	6 1/2	27 3/8	33 3/8	a	a	a	a						
1010	Recessed	3/8"	1 1/2"	100'	24	34 3/4	6	27 3/8	38 1/8	4	2 1/2	4	2 1/2	25	35 3/4	5 3/4	26	36 7/8	6 5/8
1011	Semi-recessed	1 1/4"	1 1/2"	Poly	24	34 3/4	6	27 3/8	38 1/8	4	2 1/2	4	2 1/2	25	35 3/4	4 7/8	26	36 7/8	5 3/4
1012	Trimless	2 1/2"	1 1/2"	75'	24	34 3/4	6	27 3/8	38 1/8	4	2 1/2	4	2 1/2	25	35 3/4	3 5/8	26	36 7/8	4 1/2
1016	Surface		1 1/2"	SJRL	24	34 3/4	6	24 1/4	35	4	2 1/2	4	2 1/2	24 1/2	35 1/4	6 1/4			
1018	Surface		1 1/2"	Hose	27 3/16	37 15/16	6 1/2	27 3/8	38 1/8	a	a	a	a						

a- No knockouts provided unless specified on surface mounted cabinets

Note: Add 5/8" to depth of wall opening required for cabinets with aluminum frames

NOTE: FIRE RATED CABINETS HAVE NO KNOCKOUTS

