


CANOPY STYLE For Use With Fire Hose Rack Assembly & Fire Extinguisher

Series 1500 cabinets will accommodate a single 1 1/2" Fire Hose Rack assembly with lined hose and a portable Fire Extinguisher.

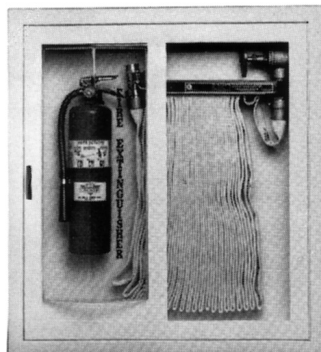

1500 Series

STANDARD EQUIPMENT

- * Heavy gauge steel construction tub, door and trim
- * White powder coat finish
- * Continuous steel piano hinge
- * Pull handle with roller catch

CABINET OPTIONS

- * Suffix **AL** for clear anodized aluminum door and frame
- * Suffix **SS** for Stainless Steel # 4 finish door and frame
- * Door Styles See page 2-6
- * Other cabinet options See page 2-7,2-19 and 2-20

ORDERING PROCEDURE

- * Select cabinet Figure No.
- * Select door style
- * Select type of hose rack assembly (Refer to Section 3000)
- * Select Fire Extinguisher (Refer to Section 4000) (maximum sizes are 2 1/2 gallon water, 15 1/2lb. Halotron, 10 lb. Carbon dioxide or 10 lb. Dry Chemical) *Select cabinet options

Fig. No.	Trim Style	Trim Pj. Tp.	Valve Cap.	Hose Cap.	Inside box dimensions			Overall Outside dim		Wall Knockout locations				Opening Required		
					A	B	C	D	E	J	K	M	N	Width	Height	Depth
1500	Recessed	3/8"	1 1/2"	100' Poly	32 3/4	34 3/4	5 1/2	36 1/8	38 1/8	4	2 3/4	4	4	33 3/4	35 3/4	7 3/4
1501	Semi-recessed	1 1/4"	1 1/2"		32 3/4	34 3/4	5 1/2	36 1/8	38 1/8	4	2 3/4	4	4	33 3/4	35 3/4	6 7/8
1508	Surface		1 1/2"		35 15/16	37 15/16	5 1/2			a	a	a	a			
1510	Recessed	3/8"	1 1/2"	125' Poly	32 3/4	38 3/4	5 1/2	36 1/8	42 1/8	4	2 3/4	4	4	33 3/4	39 3/4	7 3/4
1511	Semi-recessed	1 1/4"	1 1/2"		32 3/4	38 3/4	5 1/2	36 1/8	42 1/8	4	2 3/4	4	4	33 3/4	39 3/4	6 7/8
1518	Surface		1 1/2"		35 15/16	41 15/16	5 1/2			a	a	a	a			

a- No knockouts provided unless specified

Note: Add 5/8" to depth of wall opening required for cabinets with aluminum frame
Canopy projects 3" beyond cabinets

