

HYFLO

FIRE PROTECTION


HYF - RA Pressure Restricting Angle Hose Valve – 175PSI

Application: Fire Protection
 Brass Valve Red Hand Wheel
 Female NPT Inlet & Female Thread Outlet
 UL listed – FM approved

MATERIAL SPECIFICATIONS

No.	PART	SPECIFICATION
1	BODY	ASTM B584 C85700
2	Bonnet	ASTM B584 C85700
3	Holder	ASTM B584 C85700
4	Seat Seal	NBR
5	Clamping Ring	ASTM B16 C36000
6	Clamping Nut	ASTM B16 C36000
7	Set Screw	ASTM B16 C36000
8	Lock Nut	ASTM B16 C36000
9	Stem	ASTM B16 C36000
10	Wheel Washer	Mils Steel
11	Cover	ASTM B16 C36000
12	Pin	Stainless Steel 316
13	Device Nut	ASTM B16 C36000
14	Plug	PU(Polyurethane)
15	Screw	Mild Steel
16	Washer	PTFE (TEFLON)
17	O-Ring	NBR
18	PACKING NUT	ASTM B16 C36000
19	Handel Wheel	Ductile Iron
20	Wheel Nut	ASTM B16 C36000

HYF-RA

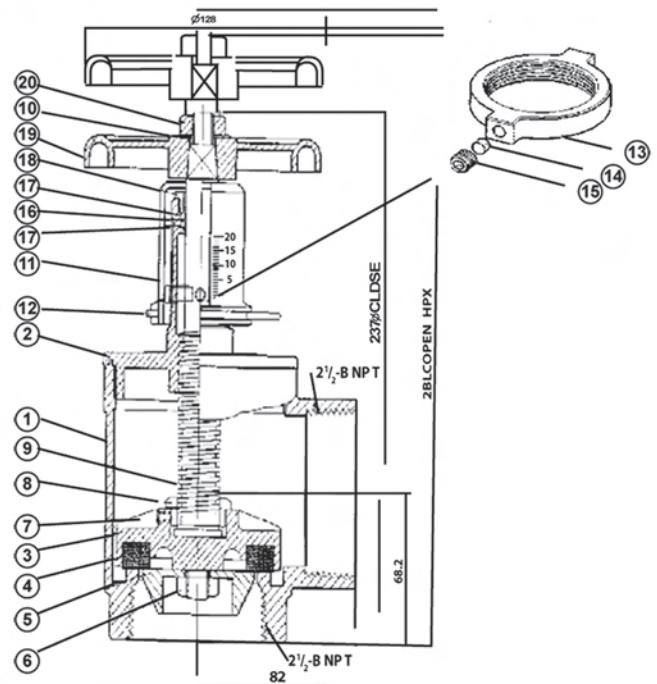

Finish

RB: Rough Brass
 PB: Polished Brass
 RC: Rough Chrome Plated
 PC: Polished chrome Plated

